

758-158 (AK4015) Throttle Control Assemble Instruction


1. Assemble throttle control with 90DEG elbow together.



2. Remove pump's valve cap (red circled as below).



3. Connect 90DEG elbow (throttle control) together with pump's valve (red circled as below).

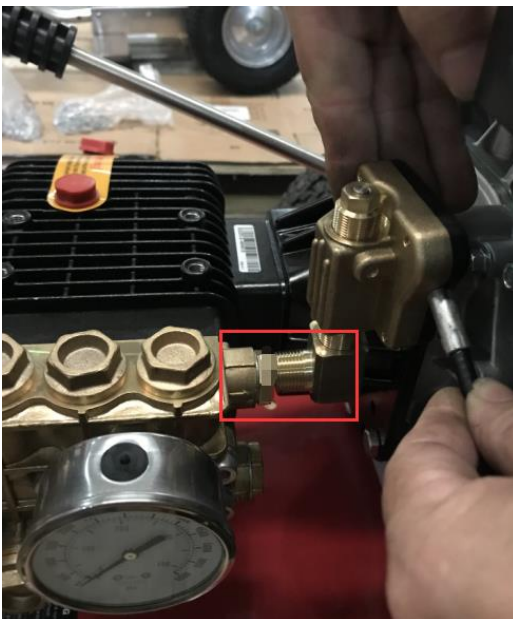

4. Remove engine's air filter (red circled as below)



5. Assemble throttle control with engine. Pls see pictures as below.



6. Assemble engine's air filter back.